


Configuration Notes (Sophos SG 125 Rev 3)

Thank you for purchasing the Sophos SG 125 Rev 3 network appliance! To make this appliance useful to people who do not have a Sophos license and don't want to get one, we have installed the OPNsense operating system and tested this appliance to ensure its working condition.

If you intend to reset OPNsense to its initial settings, we still recommend that you read the remainder of this note to familiarize yourself with how OPNsense interacts with this device's components.

This model has on-device labeling of physical ports. When configuring OPNsense, we made interface designations consistent with this labeling to reduce confusion:

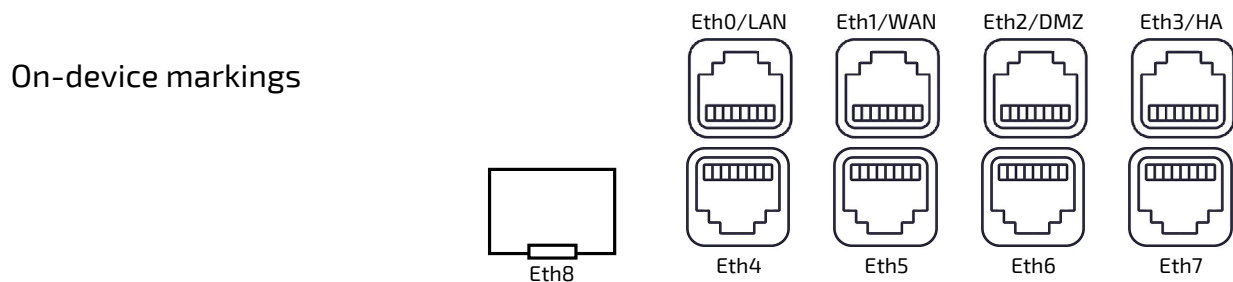

On-device marking	OPNsense internal designation	Functional designation set by us
Eth0/LAN	ix0	LAN
Eth1/WAN	ix1	WAN
Eth2/DMZ	ix2	OPT1
Eth3/HA	ix3	OPT2
Eth4	igb0	Not set
Eth5	igb1	Not set
Eth6	igb2	Not set
Eth7	igb3	Not set
Eth8	igb4	Not set

In short, the port labeled **LAN** is now officially a **LAN** port, and same goes for **WAN**.

We have configured the **WAN** port to act as DHCP client (i.e., to ask the upstream device for an IP address). The **LAN** port has been configured to provide DHCP service; its IP address is **192.168.1.1**.

The management interface is accessible **on the LAN port only** at **<https://192.168.1.1>**; the login name is **root**, the password is **password** (we changed the default password to get rid of the nagging reminders in the management interface). Take a moment to change the password to something more secure (navigate to **Lobby** >> **Password** in the management interface and change the password there).

Happy networking!

The **ncbase** team